


IRIDIUM EXTREME PTT : OVERVIEW

Your Iridium Extreme is equipped with a dedicated SOS button which you may use to obtain emergency assistance anywhere in the world through Travel Safety Group Limited (GEOS).

Registration is required online at : geosalliance.com/iridium

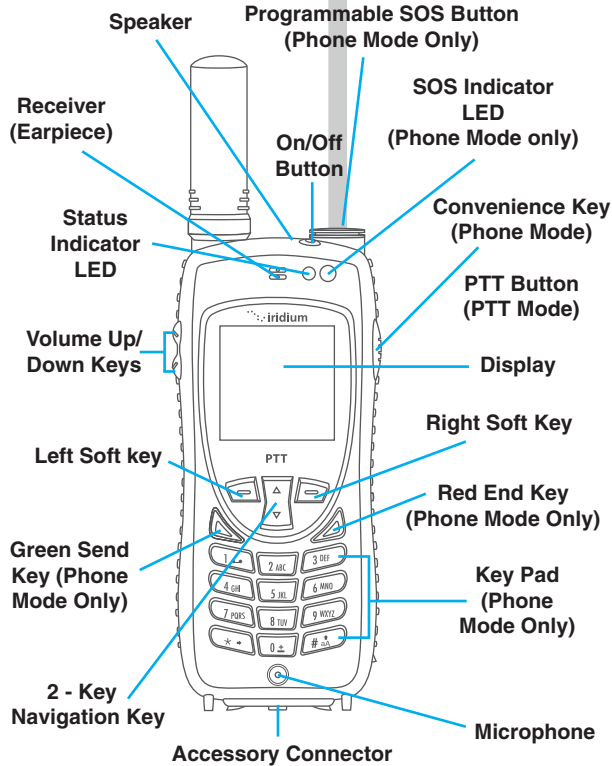

Antennas are fragile.

Please pull gently upwards.



OK to bend side-to-side
DO NOT twist antenna.
Twisting damages phone.

IMPORTANT Batteries must be pressed firmly into place. They must sit flush against the phone. Phone will not charge and may not turn on. Display may have issues.

TO ACTIVATE YOUR SIM CARD

Call us at
1.941.955.1020

- or -

email us at
activations@satellitephonestore.com

4 LOCATIONS WORLDWIDE

Satellite Phone Store Alaska

1231 West Northern Lights Blvd, Ste.202
Anchorage, AK 99503

Satellite Phone Store California

2830 Shelter Island Dr.
San Diego, CA 92106

Satellite Phone Store Ensenada

Calle Riveroll #885
Local C Zona Centro, Ensenada B.C.

Satellite Phone Store Florida

1414 S Tamiami Trail
Sarasota, FL 34239



Iridium Extreme PTT

HOW TO USE YOUR SATELLITE PHONE

QUICK GUIDE


Your Satellite Phone Number

Thank you for choosing
SatellitePhoneStore!

▶ GETTING STARTED

1. Go outside to an area that has a full view of the sky.

NO TREES OR BUILDINGS OBSTRUCTING THE VIEW.

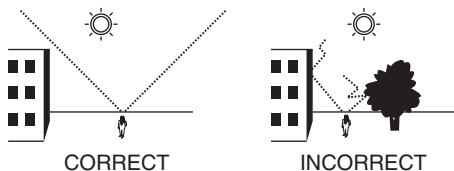

2. Fully extend the antenna on the phone. Press and hold down the power button on top until the phone turns on.
3. The phone will search for a signal. Once the screen displays “Registered” you are ready to make and receive calls.

**You MUST make a test call
before leaving for your trip!**

Free test number : 0014807525105

▶ CALLING FROM YOUR SATELLITE PHONE

To call a landline or cell phone :

Dial 00 > country code > area code > phone number

For example : 0019419551020

(USA/Canada country code is 1 - Do not include dashes or spaces)

To call a satellite phone to a satellite phone :

Dial 00 > satellite phone number

For example : 00870712345678

(Do not include dashes or spaces)


▶ SWITCHING TO PTT MODE

1. Press the **left soft key**, labeled **Menu**. Scroll down to **Switch to PTT**
2. Press the **left soft key**, labeled **Select**
3. Wait for the device to switch to PTT. The transition take approximately 10 seconds.

A “PTT” designation will appear at the top center of the screen when the transition is complete and the device will identify your Home Talkgroup at the bottom of your screen.

▶ INITIATING A TALKGROUP SESSION

1. Your display shifts from **IDLE** to **TALKING** and the Talk Tone (a series of 3 ascending notes in rapid succession) is played.
2. **Press and hold the PTT Button** while you are speaking to continue the transmission to others on the talkgroup.
3. Keep about 3 inches away from your mouth when talking to avoid static.

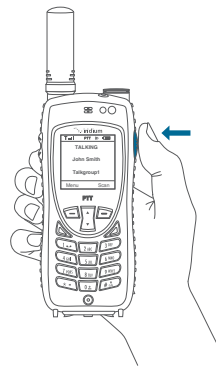

▶ LISTENING TO A TALKGROUP SESSION

Your device displays **LISTENING** when the monitored talkgroup is active, but you are not the one talking.

▶ OPEN

When the talkgroup is active but no one is talking, the screen displays **OPEN**. This indicates that the floor is available and that participants may request the floor by pushing and holding the PTT Button.

▶ PTT SCAN STATE

When talkgroups are active and are being scanned, **SCANNING** is displayed. The second line displays the **Device Name**. The third line indicates the **distance and direction** to the talker. And the fourth line displays the **talkgroup name** being sampled.

1. Press the **left soft key**, labeled **Join**, to navigate to the Home State and begin monitoring the talkgroup that was being scanned at that time.
2. Press the **right soft key**, labeled **Stop Scan**, to leave Scan State
3. Push the **PTT Button** to navigate to the Home State and begin monitoring the talkgroup being sampled at the time.

▶ TALKGROUP LIST

Cursor/Focus

- The highlighted talkgroup appears in a frame. Cursor line is always in the middle of the screen.

Active Talkgroups

- Represented by the active talkgroup names flashing.

Priority Talkgroup

- Displayed as white lettering on a black background and exclamation points on either side.

Home Talkgroup

- Represented by arrows on either side of the Talkgroup. Stays with Home Talkgroup as user scrolls.

